



Contents	Warning.....	1
Important note	Specifications.....	2
Input and output.....		3
Output	Installation dimension.....	4

**WARNING NOTICES**

**SAFEGUARDS**

Electrical energy can perform many useful functions, This unit has been engineered and manufactured to assure your personal safety. Improper use can result in potential electrical shock or fire hazards. In order not to defeat the safeguards, observe the following precautions for its installation, use and servicing.

**Explanation of Graphical Symbols**



**CAUTION  
RISK OF ELECTRIC SHOCK  
DO NOT OPEN**



**CAUTION  
RISK OF ELECTRIC SHOCK :  
OPEN ONLY IF QUALIFIED  
AS SERVICE PERSONNEL**

**WARNING: TO PREVENT FIRE OR ELECTRIC SHOCK, DO NOT EXPOSE  
THIS EQUIPMENT TO RAIN OR MOISTURE**



**Important Note Specifications**

**IMPORTANT NOTE**


ATTENTION: This unit must be protected from damp because of the risk of fire and the possibility of electric shocks

1. Make sure that you have the correct mains voltage. Only operate the unit at the mains voltage marked on the rear panel.
2. Make sure that nothing especially no metal objects are inserted into the device. This could result in electric shock or malfunction.
3. If the unit is subjected to extreme fluctuations of temperature e.g. On being transported from outside into a heated room, condensation can form. This unit should not be used until it has reached room temperature.
4. In the event of water or any other fluid being accidentally spilt on the unit switch the unit off immediately and send it to a qualified service workshop for inspection.
5. Make sure that the unit is always well ventilated and never exposed to direct sunlight
6. Do not use sprays to clean the unit as they have a detrimental effect on the unit and could ignite suddenly.
7. The machine use single power switch, please cut off the power before fix.
8. Please do not put the cup, vessel of flower or container above the machine, in case the leak out water then cause the leakage current off the machine.

ITEM	D2450'	D2650'	D2800'
8Ω Power	2×450W	2×650W	2×800W
4Ω Power	2×500W	2×700W	2×850W
Frequency Response	20Hz-20KHz ±1dB		
THD+N 1KHz 1W 8Ω	<0.1%		
Signal to Noise Ratio 1KHz	>100dB		
Channel Separation 1KHz	>80dB		
Class	D		
Protection	Short,DCP,OVP,UVP,OCP,OTP		
Operating Voltage	90V-135V / 180V-265V		
Input Sensitivity	0.77V		
Input Impedance	20KΩ		
Fuction	HI-PASS,VOLUME		
Dimensions(W×H×D)	332×160×100mm		
Packing Dimension	370×225×170mm		
Net Weight(kg)	2.75		
Gross Weight(kg)	3.45		



## Input and output

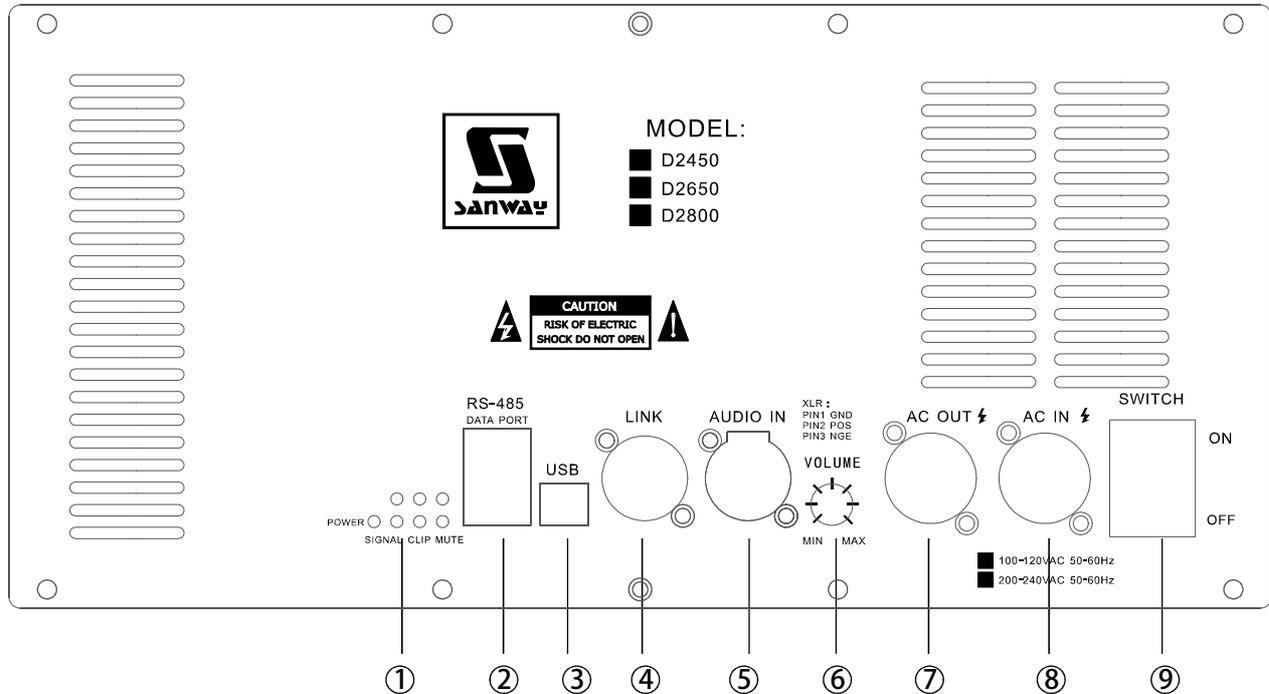

- 1.LED INDICATORS
2. 485 DATA CONTROL INPUT AND OUTPUT
3. USB DATA CONTROL INPUT
- 4.AUDIO LINK OUTPUT
- 5.AUDIO INPUT
- 6.VOLUME CONTROL
- 7.POWER SUPPLY LINK
- 8.POWER SUPPLY INPUT
- 9.POWER SWITCH




SANWAY AUDIO

<https://www.china-sanway.com>

Output

Installation dimension

### Output connections

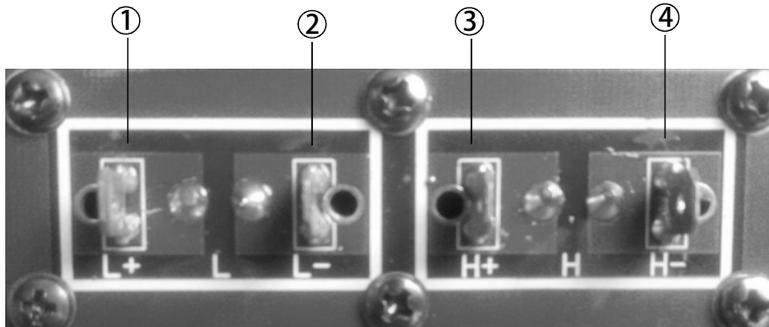

- ① OUT L+ POSITIVE
- ② OUT L- NEGATIVE
- ③ OUT H+ POSITIVE
- ④ OUT H- NEGATIVE



D2450  
D2650  
D2800

INSTALLATION DIMENSION